



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

10 / 5 - 898

PCT/EP 03 / 50728

11 APR 2005

REC'D 24 DEC 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02292559.8

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1 (a)-OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr.:
Application no.: 02292559.8
Demande no:

Anmeldetag:
Date of filing: 16.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Thomson Licensing S.A.
46, quai A. Le Gallo
92100 Boulogne-Billancourt
FRANCE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Secure exportation from a global copy protection system to a local copy
protection system

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G06F1/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Field of the invention

The invention relates generally to the copy protection problem. More particularly, the invention relates to a device and a method for preventing illegal exportation of a content from a global copy protection system to a local copy protection system.

Background art

Copy Protection has been a hot topic for the last few years. First Copy Protection Systems (CPS) that have been studied rely on link encryption (see for example the "DTCP" proposal disclosed in *"Digital Transmission Copy Protection Specification – Vol. 1 (Informational version) – Rev. 1.2 – July 11, 2001"* available at the following Internet address http://www.dtcp.com/data/info_dtcp_v1_12_20010711.pdf) or prerecorded / recordable media protection (see for example the "CPSA" proposal disclosed in *"Content Protection System Architecture, A Comprehensive Framework for Content Protection – rev 0.81 – February 17, 2000"* available at the following Internet address <http://www.4centity.com/data/tech/cpsa/cpsa081.pdf>). These systems will be called "local CPS" in the following of the description.

The focus of Copy Protection has recently moved to a global security of the content through the home network and a new category of systems, that will be called "global CPS" in the following, has been investigated by normalization bodies (such as "DVB-CPT" or "TV-Anytime" forum) and industry efforts (see for example the "SmartRight" proposal disclosed in *"SmartRight Technical white paper – version 1.0 – October 29, 2001"*).

Local CPS usually have four different usage rules:

- "copy-free" (one may copy the content without any limitations),
- "copy-never" (one may not copy the content),
- "copy-once" (one may copy only once the content),
- "copy-no-more" (one may not copy the content because it is the copy of a "copy-once" content or an already copied "copy-once" content).

However, because of implementation difficulties, the "copy-once" usage rule has often been replaced by "copy-one-generation" usage rule (one may copy only the original content), leading to a much wider possible use of the content than expected.

Global CPS replace the "copy-once" or "copy-one-generation" and "copy-no-more" usage rules with the "private-copy" usage rule. The "private-

copy" usage rule allows to make as many copies as desired but the copy will be only usable within the home network wherein it has been created. That usage rule is easy to implement and in line with both users and content owners interests.

5 One problem encountered with these systems is due to the fact that global CPS coexist with local CPS. A user may want to export a "private-copy" content from a global CPS to a local CPS. For instance, a user may want to make a back-up copy from a "private-copy" content created in a global CPS on an optical disc (such as a DVD – acronym of "Digital Versatile Disc" – or a BRD
10 – acronym of "Blu-Ray Disc") protected by a local CPS. The "private-copy" usage rule in the global CPS is logically changed to the "copy-no-more" usage rule in local CPS. But this is insufficient since as many "copy-no-more" copies as desired can be created from the "private-copy" content. This feature is clearly in contradiction to the copy-no-more usage rule.

15 It is therefore an object of the present invention to provide a method ensuring that a content protected by a global CPS and labeled "private-copy" cannot be exported (as a "copy-no-more" content") an unlimited number of times to a local CPS.

20 Summary of the invention

The main idea of the invention is to associate a Content Unique Identifier (CUI) to any content entering a home network protected by a global CPS. This CUI will be checked when the content will leave the global CPS for a local CPS.

25 More particularly, the invention relates to a device for preventing illegal exportation of a content protected by a global copy protection system to a local copy protection system, characterized in that it each content liable to be exported contains a unique identifier and in that the device comprises a table for storing unique identifiers of all contents that have already been exported
30 through said device.

The invention also relates to a method for recording a content received by a device as above-mentioned, characterized in that it comprises the steps consisting, if the copy is to be made for a local copy protection system, in checking whether the unique identifier of said content is contained in the table
35 of said device; and

- should said checking be positive, in preventing the recording; and

- should said checking be negative, in recording the content and storing the unique identifier in the table.

Thanks to the invention, it is possible to control the number of local CPS-protected copies created from a global CPS-protected content.

5

Brief description of the drawings

The various features and advantages of the present invention and its preferred embodiments will now be described with reference to the accompanying drawings which are intended to illustrate and not to limit the scope of the present invention and in which:

10

- Fig. 1 illustrates the environment of the invention and the principle of exportation of a content protected by a global CPS to a content protected by a local CPS; and

- Fig. 2 is a flowchart illustrating the behavior of a device carrying out the exportation process.

15

Description of the preferred embodiments

Fig. 1 illustrates the environment of the invention. It may be for example a digital home network 1 protected by a global CPS, this network comprising two Access Devices 12, 13 and two Recorder Devices 14, 15 linked together by a digital bus 16.

20

The principles of protection of the data by the global CPS in the home network are disclosed in document FR-A-2 792 482 and in a French patent application No. 01 05568 filed April 25, 2001 by the applicant THOMSON Licensing S.A..

25

Interactions between local and global CPS are ensured thanks to the following devices:

- the Access Devices that receive local CPS-protected contents from the outside of the network and convert them into global CPS-protected contents; and
- the Recorder Devices that create either global CPS-protected copies 10 or local CPS-protected copies 11.

30

We will now describe more particularly the Access Devices behavior and the Recorder Devices behavior according to the principles of the invention.

35

1. Access Devices behavior

Each time an Access Device is required to convert a local CPS-protected content it receives from the outside of the network into a new global CPS-protected content, it generates a Content Unique Identifier associated with this new content. It then inserts the CUI in the content, preferably in a part of the content protected by encryption or authentication.

The CUI may be "probably unique" (for example a large size random number generated by a pseudo-random generator) or "actually unique". In the latter case, Access Devices should be given a unique identifier at their installation in the network. This identifier will be the first part of the CUI. The second part will be a counter maintained by the Access Device. The CUI is preferably at least 80 bits long.

2. Recorder Devices behavior

This behavior is illustrated by the flowchart of Fig. 2.

A Recorder Device is capable of recording a content having a "private-copy" status and created in the network protected by the global CPS to create a local CPS-protected copy of this content.

According to the invention, each Recorder Device has a Content Exportation Table (CET) storing all the CUIs of local CPS-protected content that have already been created. This CET is preferably stored in a protected memory of the Recorder Device.

As illustrated in Fig. 2, each time the recorder device is requested to create a new copy of a "private-copy" content (step 20), if the copy remains global CPS-protected (i.e. the copy is destined to be used in the home network protected by the global CPS), then the recorder simply duplicates this content (step 22). Otherwise, if the new copy is a local CPS-protected content (i.e. a copy to be used outside the network in another system protected by a local CPS) then, the Recorder Device first extracts the CUI from the content and checks whether it is already in its CET or not (step 24). If so, the content is blocked and the copy does not takes place (step 26). Else, the Recorder Device adds the CUI in the CET and creates the copy. The local CPS should treat the copy as a "copy-no-more" or "copy-never" content.

It is also possible to allow the Recorder Device to make more than a single local CPS-protected copy of a given "private-copy" content. In this case, the CET will store with each CUI, a counter of the number of local CPS-protected copies made for this content, this counter being incremented each time a local CPS-protected copy is made for this content. When the maximum

number of allowed copies is reached for a given content, then the Recorder Device will not make any more local CPS-protected copy of this content.

According to a variant embodiment, only a limited number of Recorder Devices is authorized to make copies protected by a local CPS in a home network such as network 1. Preferably, only one Recorder Device per network is authorized to make copies protected by a specific local CPS. These Recorder Devices are called exportation devices. In Fig. 1, Recorder Device 15 is an exportation device. The Recorder Devices that can create only global CPS-protected copies are called storage units. Recorder Device 14 of Fig.1 is a storage unit. In this preferred embodiment, only the exportation devices have a CET for storing the CUI of contents already copied with a local CPS protection.

We suppose now that the global CPS is the SmartRight™ system (SmartRight is a trademark of THOMSON multimedia) disclosed in the documents previously mentioned (document FR-A-2 792 482 and application No. 01 05568 of THOMSON Licensing S.A.) and in a further French patent application No. 01 11078 filed August 24, 2001 in the name of THOMSON Licensing S.A..

The Access Devices illustrated in Fig. 1 comprise converter cards (not illustrated in Fig. 1) which are in charge of creating messages called LECM (acronym of "Local Entitlement Control Message"). The LECMs contain control words CW which are used to scramble the content entering the home network through an Access Device. These CW are contained in a part of the LECM which is protected (preferably by encryption with a key or with keys specific to the network).

According to the present invention, the converter card randomly chooses the CUI during the LECM building step when a content is received in the network by an Access Device. The CUI is then placed in the protected part of the LECM.

Recorder Device 15 which is an exportation device comprises a terminal card (not illustrated). This terminal card is a smart card, i.e. a card with a secure microprocessor, containing the key(s) necessary to decrypt the protected part of the LECM and it furthermore contains, according to the invention, the CET for storing the CUI of the contents already copied by Recorder Device 15 with a local CPS protection.

When Recorder Device 15 receives a new content (having a "private-copy" status) to be exported (i.e. to be used to perform a local CPS-protected

copy of this content), its terminal card first checks whether the CUI contained in the first LECM associated with this content is already in its CET or not. If yes, the terminal will output a message forbidding the copy. Else, it will add the CUI in the CET and then output a message authorizing the copy.

- 5 Preferably, the CET is not erased after a terminal card reinitialization.

CLAIMS

- 5 1. Device (15) for preventing illegal exportation of a content protected
by a global copy protection system to a local copy protection system,
characterized in that it each content liable to be exported contains a unique
identifier (CUI) and in that the device (15) comprises a table (CET) for storing
unique identifiers of all contents that have already been exported through said
device.
- 10 2. Method for recording a content received by a device according to
claim 1, characterized in that it comprises the steps consisting, if the copy is to
be made for a local copy protection system, in:
- 15 checking whether the unique identifier (CUI) of said content is
contained in the table (CET) of said device; and
- should said checking be positive, then preventing the recording;
and
 - should said checking be negative, then recording the content and
storing said unique identifier (CUI) in said table.

20

ABSTRACT**Secure exportation from a global copy protection system to a local copy protection system**

5

The invention relates to a device (15) for preventing illegal exportation of a content protected by a global copy protection system to a local copy protection system. According to the invention, each content liable to be exported contains a unique identifier (CUI) and the device (15) comprises a
10 table (CET) for storing unique identifiers of all contents that have already been exported through said device.

The invention also relates to a method for recording a content received by such a device. This method comprises the steps consisting, if the copy is to be made for a local copy protection system, in checking whether the
15 unique identifier (CUI) of said content is contained in the table (CET) of said device; and

- should said checking be positive, in preventing the recording; and
- should said checking be negative, in recording the content and storing said unique identifier (CUI) in said table.

20

Fig. 1

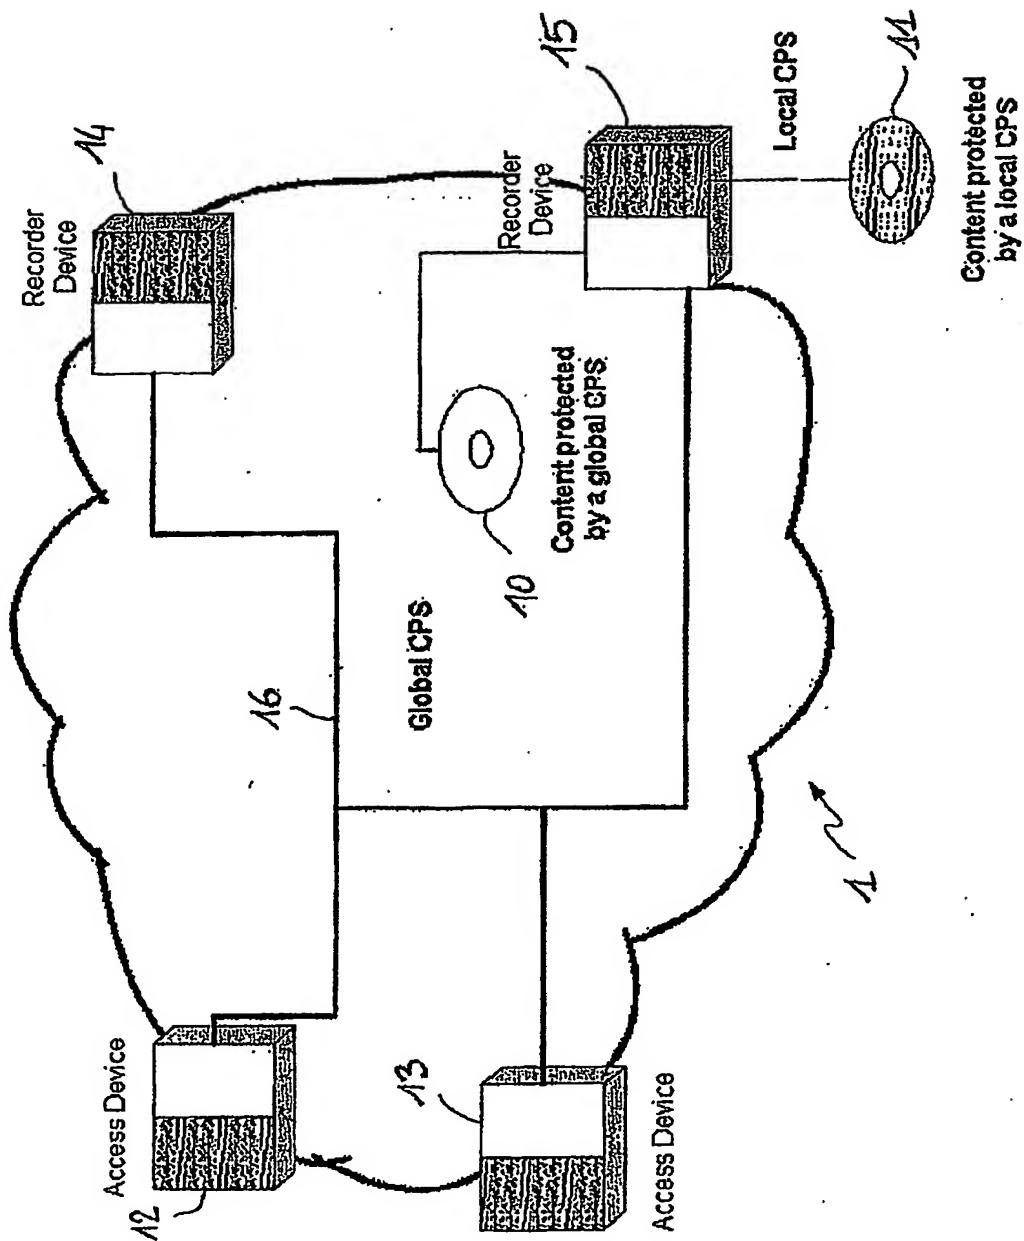


Fig. 1

212


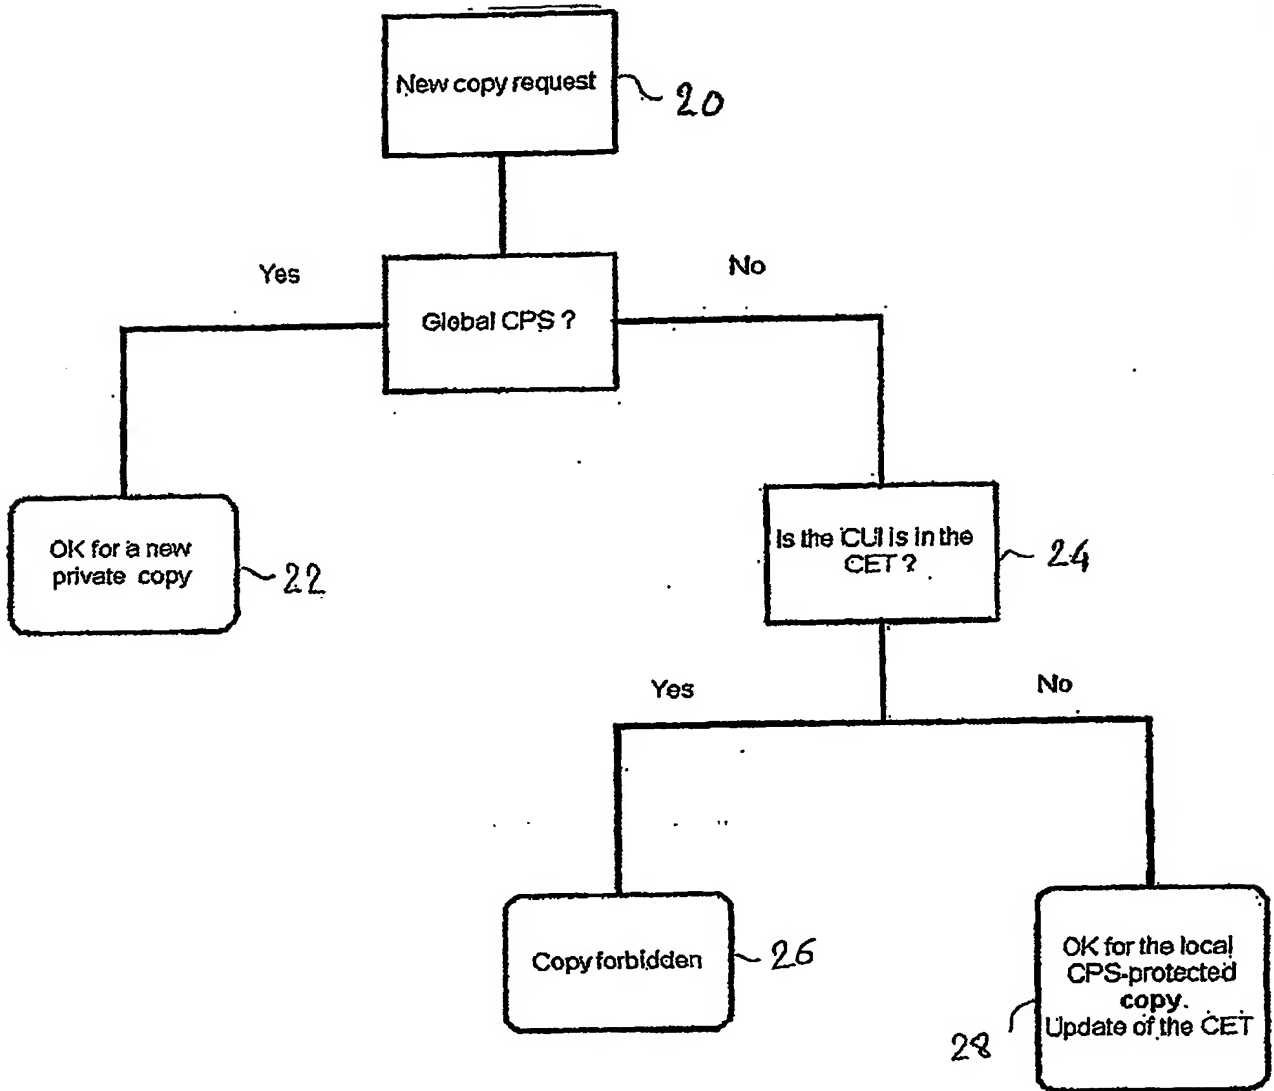


Fig. 2

PCT Application

EP0350728



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.